




KUNZ PG SERIES PORTABLE GENERATOR

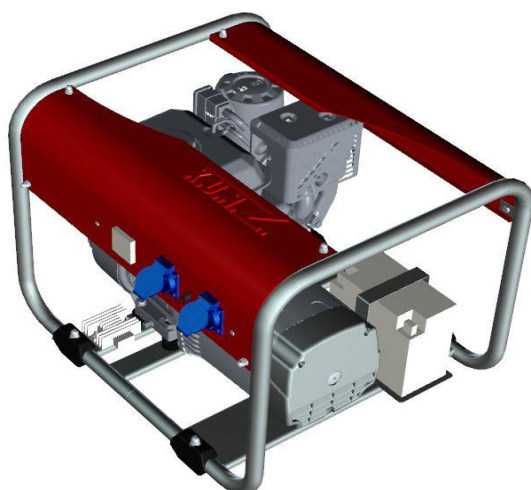

Features

- The Kohler OHV engine incorporates splash lubrication and provides long life.
- Large-capacity metal fuel tank with incorporated fuel gauge provides durability and extended run times.
- Low-oil level shutdown automatically safeguards engine from damage.
- Hardened steel tube frame for added strength and durability.
- Low fuel consumption will save your money and time.

Equipments

- | | |
|--|---|
| ◊ Plugs and panel descriptive | ◊ Fuel gauge |
| ◊ Inverter control | ◊ Oil sensor |
| ◊ Auto power saving function | ◊ Radio frequency interference protection |
| ◊ 2x230V, 16Amp Socket Circuit Breaker | ◊ Electronic breaker |
| ◊ DC output | ◊ Varta Battery |

Standard Generator Features

- | | |
|------------------------------|----------------|
| ◊ Product Series | : KPG3500 |
| ◊ Frequency | : 50 |
| ◊ Max Power, kVa | : 3,5 |
| ◊ Max Power, kW | : 3,5 |
| ◊ Rated voltage @ AC output | : 230 |
| ◊ Rated voltage @ DC output | : 12 |
| ◊ Number of phase | : Single Phase |
| ◊ Noise level @ rated output | : 68 dBA @7m |

Engine Specifications

- | | |
|--------------------------|---|
| ◊ Engine brand | : Kohler |
| ◊ Model | : CH 395 |
| ◊ Type | : Air cooled, 4 cycle, O.H.V. Gasoline engine |
| ◊ Engine, RPM | : 3000 |
| ◊ Displacement, ml | : 277 |
| ◊ Fuel | : Petrol (unlead) |
| ◊ Fuel capacity, L | : 7.0 |
| ◊ Consumption, L/h | : 2.10 |
| ◊ Oil Capacity, L | : 1.3 |
| ◊ Recommended oil | : SAE 10W30 |
| ◊ Starting system | : Recoil start (electric starter as option) |
| ◊ Dimensions (LxWxH), mm | : 403 x 428 x 424 |
| ◊ Dry weight, kg | : 27.9 |

Alternator Specifications

- | | |
|--------------------|--|
| ◊ Brand | : Linz |
| ◊ Model | : SP10SE |
| ◊ Type | : Brushless synchronous with capacitor |
| ◊ Phase | : Single phase |
| ◊ Poles | : 2 |
| ◊ Protection class | : IP 21 |
| ◊ Insulation class | : H |

Dimensions & Weight

- | | |
|--------------|-------|
| ◊ Weight, kg | : 67 |
| ◊ Length, mm | : 810 |
| ◊ Height, mm | : 590 |
| ◊ Width, mm | : 555 |

K.U.N.Z. Handels-&Produktions GmbH

Headquarter

Oskar-von-Miller-Strasse 29
 68309 Mannheim, Deutschland
 Tel. : +49 621 - 76 217 733
 Faks: +49 621 - 76 217 734

U.K. Branch

1 Canada Square Canary Wharf, Floor 37
 London, United Kingdom
 Tel. : +44 (0) 20 7718 0185
 Faks: +44 (0) 20 7718 0001

Turkey Branch

Mansuroglu Mh. 295/2 Sk. Ege Sun
 Plaza A Blok No:1 K:6 D:652 Bayraklı,
 35535 İzmir
 Telefax. : +90 232 461 66 91

Truly Global, Fully Reliable